


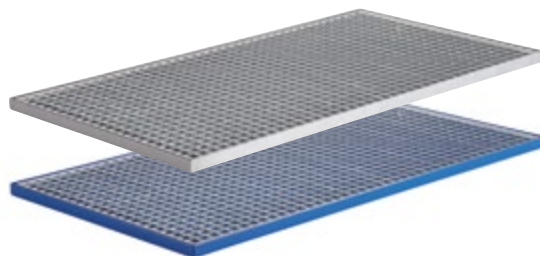


Spill Flooring steel



- ▶ Used primarily when storing petroleum products and oils, prevents leakage and environmental pollution.
- ▶ Flooring can be arranged as required.
- ▶ With galvanised grid.
- ▶ Can be fitted with galvanised ramps.


Type **7560 / 7560-Z**

 33 l
 1200 × 800 × 35 mm
 44 kg



Type **6080**

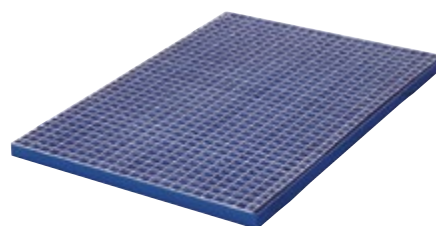

 1450 × 770 × 31 mm
 51 kg



Ramps

For Long Side (for Type 7560)



Type **7561-L**

 1200 × 475 × 35 mm
 14 kg



For Short Side (for Type 7560)



Type **7561-S**


 800 × 475 × 35 mm
 9.5 kg



For Short Side (for Type 6080)

Type **6081**


 740 × 475 × 32 mm
 16.5 kg




Joining Strips

For Long Side


Type **7560-L**

 1180 × 20 mm



For Short Side


Type **7560-S**

 780 × 20 mm



Corner Connector

Type **7560-K**

 20 × 20 mm
--

