

Containers tipping

- ▶ A simple system ensures the lid opens automatically during tipping.
- ▶ The lid serves primarily as protection against rain and wind.




Type 6570
1650 × 1070 × 1115/1355 mm
195 kg
800 kg
800 l
800 mm

Type 6571
1650 × 1570 × 1115/1355 mm
257 kg
1000 kg
1100 l
800 mm

- ▶ Features a double bottom and a drain.
- ▶ The double bottom enables the separation of solid particles from liquids.



Type 7338
1650 × 1060 × 815/1055 mm
190 kg
800 kg
600 l
800 mm

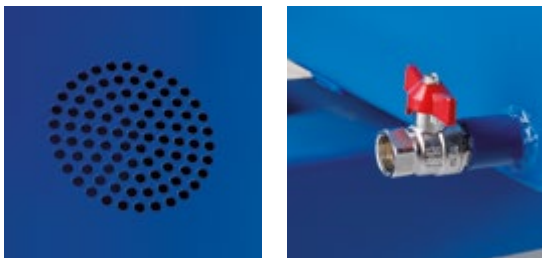

1. The double bottom separates solids from liquids.
2. Drain tap on the back of the container.



Type 7339
1650 × 1570 × 815/1055 mm
213 kg
1000 kg
900 l
800 mm

- ▶ For collecting and handling waste or raw products.
- ▶ Handling by forklift.
- ▶ Tipping using a cable from the forklift driver's seat.
- ▶ The body is secured against spontaneous tipping.
- ▶ Available in other colours on request.



Type 7074
1320 × 1650 × 1080/1320 mm
226 kg
1200 kg
1000 l
800 mm

Containers can be supplemented with castors (polyamide – suitable for smooth surfaces; or rubber – suitable for uneven surfaces) – available for order in Handling Equipment / Transport and Machine Castors.



Dimensions (A × B × C)
X = pocket spacing
 Listed height (C) is without castors / with castors.