

Protective Curtains and Mobile Partitions



- ▶ Used for thermal separation of both indoor and outdoor spaces.
- ▶ Made of PVC, with no cadmium or silicone content.
- ▶ Resistant to many chemicals, can be used at temperatures from $-15\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$.
- ▶ Prevent entry of smoke, vapour, dust, insects, or birds.
- ▶ Help reduce noise and are highly transparent.
- ▶ Curtains for welding areas, as well as mechanically resistant curtains, or coloured curtains are available on request.



Standard Curtain

Type **7238**

300 × 2 mm × 50 m



Temperature Resistant Curtain

Type **7239**

300 × 3 mm × 50 m

$-40\text{ }^{\circ}\text{C}$ / $+50\text{ }^{\circ}\text{C}$

Curtain with Loops (5 Pcs)

Type **7240**

300 mm (width)


Rail with Hooks

Type **7241**

984 mm (width)


Hanging Methods and Overlap Options

- ▶ Minimal overlap 35 %.

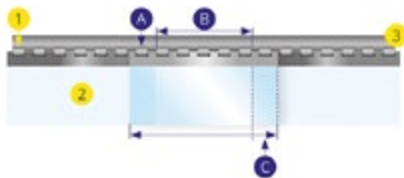


1. Stainless steel hook. 2. PVC curtain. 3. Door frame, wall.

- ▶ Medium overlap 54 %.

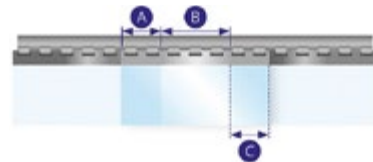

- ▶ Maximal overlap 90 %.



- ▶ For easy handling, one side is fitted with braked castors with 80 mm diameter, the other side features a 600 mm foot to guarantee high stability.
- ▶ Any number of barriers can be interconnected to create a continuous protective wall.
- ▶ The hanging system allows for connection at various angles.
- ▶ Made of steel profile.



On request, curtains can be made of impregnated, fire-resistant fabric.



Type **7300**

1500 × 600 × 2200 mm

28 kg



Type **7301**

2000 × 600 × 2200 mm

32 kg



Type **7302**

2500 × 600 × 2200 mm

32 kg