




For dry environments

- ▶ Made of extremely sturdy rubber.
- ▶ Resists temperatures up to 160 °C.
- ▶ Individual squares (0.9 m × 0.9 m) can be interconnected to fit any surface.
- ▶ Suitable for use in areas where workers stand for an extended period of time.
- ▶ Yellow edge and corner pieces available for order.



Type **3174**  
 0.9 × 0.9 m, 16 mm\*

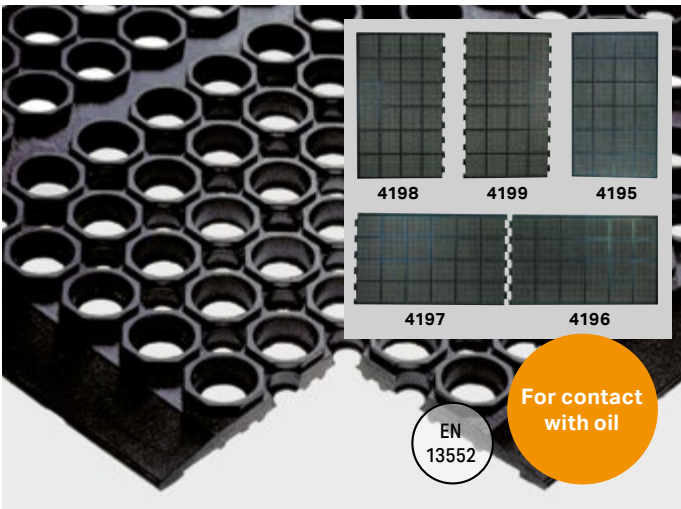

For contact with oil  
 EN 13552

- ▶ Made of natural SBR rubber and nitrile.
- ▶ Outstanding resistance to most oils and fats.
- ▶ Individual mats can be interconnected with runner rugs with a width of 0.9 m or 1.5 m.
- ▶ Elevated ringed surface provides outstanding slip protection and helps prevent glass objects from breaking.
- ▶ Spilled liquids seep down through the holes, leaving the top surface dry and safe.
- ▶ Complies with anti-slip standard EN 13552 category R10.

Type <b>4195</b>	Type <b>4196</b>	Type <b>4197</b>	Type <b>4198</b>	Type <b>4199</b>
0.9 × 1.5 m, 14 mm*	0.9 × 1.5 m, 12.5 mm*	0.9 × 1.5 m, 12.5 mm*	0.9 × 1.5 m, 12.5 mm*	0.9 × 1.5 m, 12.5 mm*



For high temperature environments  
 EN 13552

- ▶ Made of natural SBR rubber and a 25 % nitrile mix.
- ▶ Improved resistance to oils and fats.
- ▶ Connecting modules creates a runner of any length – 0.7 m module width.
- ▶ Provides comfort during extended periods standing in place.
- ▶ Sloping edge serves as a ramp.
- ▶ Checker plate surface prevents slipping.
- ▶ Complies with anti-slip standard EN 13552 category R9.

Type <b>4200</b>	Type <b>4201</b>	Type <b>4202</b>
0.7 × 0.8 m, 12.5 mm*	0.7 × 0.8 m, 12.5 mm*	0.7 × 0.8 m, 12.5 mm*

\* Mat height